

# VANADIS 6-SuperClean™



High performance powder metallurgical cold work tool steel

COLD WORK


PLASTIC MOULDING

HOT WORK

HIGH PERFORMANCE STEEL

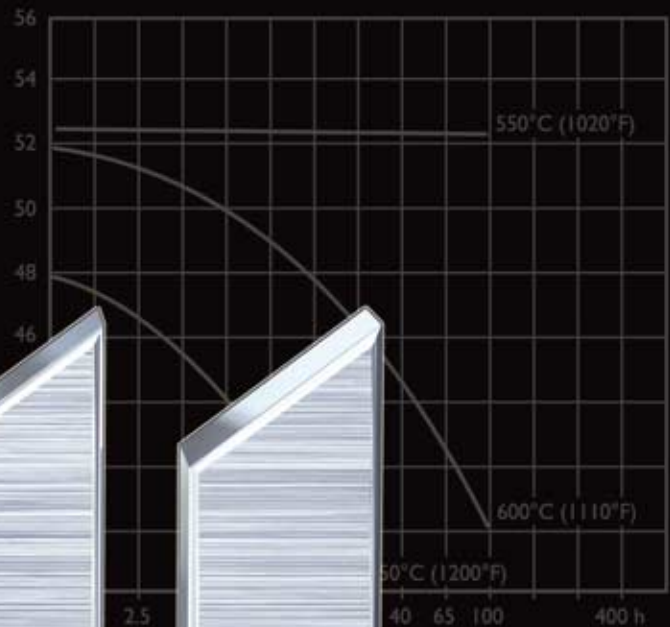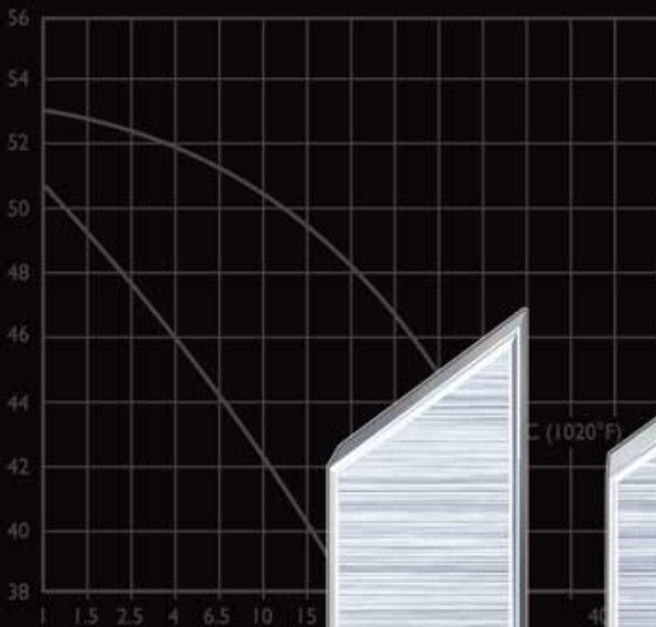

Typical analysis %	C 2,05	Mn 0,8	Cr 4,5	W 0,2
Standard specification	AISI D6, ( )	Standard specification (D3) (W.Nr. 1.2796)		
Delivery condition	Soft annealed	to approx. 200 HB		
Colour code	Red	Your colour		

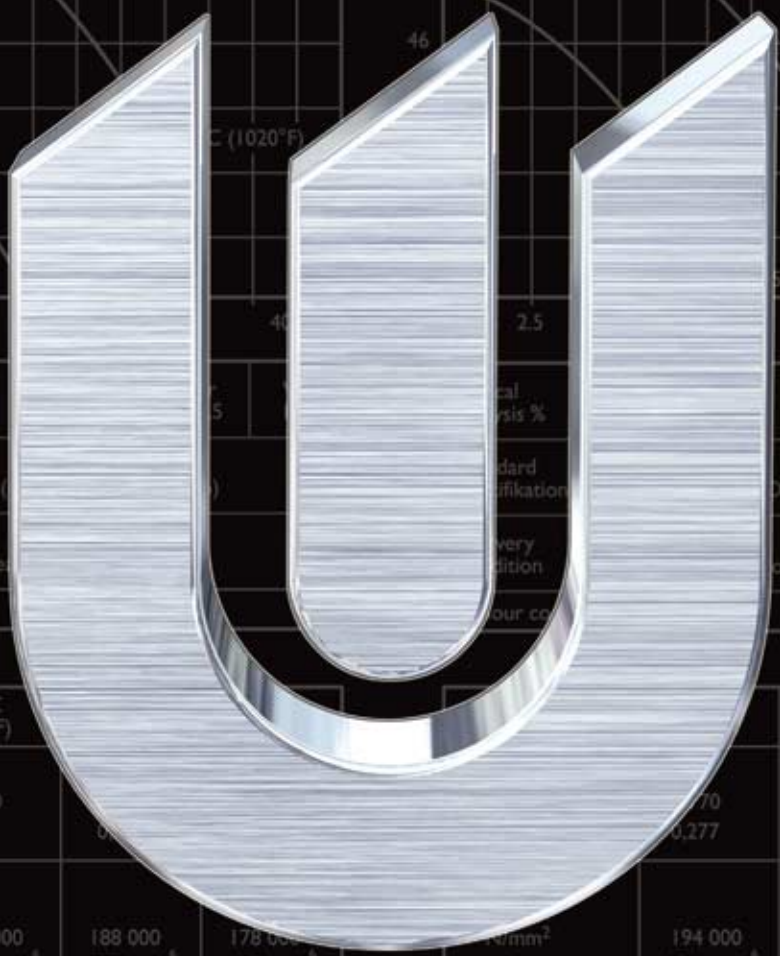

Temperature	20°C (68°F)	200°C (390°F)	400°C (750°F)
Density kg/m <sup>3</sup> lbs/m <sup>3</sup>	7 770 0,281	7 700 0,277	7 650 0,275
Modulus of elasticity N/mm <sup>2</sup> psi	194 000 28,1 × 10 <sup>6</sup>	188 000 27,3 × 10 <sup>6</sup>	178 000 25,8 × 10 <sup>6</sup>
Coefficient of thermal expansion per °C from 20°C per °F from 68°F	to 100°C 11,7 × 10 <sup>-6</sup> to 212°F 6,5 × 10 <sup>-6</sup>	to 200°C 12 × 10 <sup>-6</sup> to 400°F 6,7 × 10 <sup>-6</sup>	to 400°C 13,0 × 10 <sup>-6</sup> to 750°F 7,3 × 10 <sup>-6</sup>
Thermal conductivity W/m °C Btu in (ft <sup>2</sup> h°F)	-	27 187	32 221
Specific heat K/kg °C Btu/lbs °F	455 0,109	525 0,126	608 0,145

Temperature	20°C (68°F)	200°C (390°F)	400°C (750°F)
Density kg/m <sup>3</sup> lbs/m <sup>3</sup>	7 770 0,281	7 700 0,277	7 650 0,275
Modulus of elasticity N/mm <sup>2</sup> psi	194 000 28,1 × 10 <sup>6</sup>	188 000 27,3 × 10 <sup>6</sup>	178 000 25,1 × 10 <sup>6</sup>
Coefficient of thermal expansion per °C from 20°C per °F from 68°F	to 100°C 12,3 × 10 <sup>-6</sup> to 212°F 6,1 × 10 <sup>-6</sup>	to 200°C 14 × 10 <sup>-6</sup> to 400°F 6,7 × 10 <sup>-6</sup>	to 400°C 15,1 × 10 <sup>-6</sup> to 750°F 7,3 × 10 <sup>-6</sup>
Thermal conductivity W/m °C Btu in (ft <sup>2</sup> h°F)	-	20,5 142	21,5 149
Specific heat K/kg °C Btu/lbs °F	460 0,110	-	-

*Cover photo:*

*Powder pressing punch of VANADIS 6.  
Excellent result has been obtained for pressing iron  
powder when abrasive wear reduce the punch life.  
(Courtesy GKN Sinter Metals AB, Kolsva.)*

This information is based on our present state of knowledge and is intended to provide general notes on our products and their uses. It should not therefore be construed as a warranty of specific properties of the products described or a warranty for fitness for a particular purpose.

# Critical tool steel parameters for

## GOOD TOOL PERFORMANCE

- Correct hardness for the application
- Very high wear resistance
- High toughness to prevent premature failure due to chipping/crack formation.

High wear resistance is often associated with low toughness and vice-versa. However, in many cases both high wear resistance and toughness are essential for optimal tooling performance.

*VANADIS 6* is a powder metallurgical cold work tool steel offering a combination of very high wear resistance and good toughness.

## TOOLMAKING

- Machinability
- Heat treatment
- Dimensional stability in heat treatment
- Surface treatment.

Toolmaking with highly alloyed tool steels means that machining and heat treatment have to be more considered than with the lower alloyed grades. This can, of course, raise the cost of toolmaking.

Due to the very carefully balanced alloying and the powder metallurgical manufacturing route, *VANADIS 6* has a similar hardening procedure as the common cold work tool steels. In order to reduce the amount of retained austenite and to optimize the abrasive wear resistance high temperature tempering is recommended. One very big advantage with *VANADIS 6* is that the dimensional stability after hardening and tempering is much better than for the conventional produced cold work steels and for HSS used for cold work. This also means that *VANADIS 6* is a tool steel which is very suitable for CVD and PVD coating.

# Applications

*VANADIS 6* is suitable for long run tooling of work materials where mixed (abrasive–adhesive) or abrasive wear and/or chipping/cracking and/or plastic deformation are dominating failure mechanisms.

Examples:


- Blanking and fine blanking of harder work materials
- Forming operations where a high compressive strength is essential
- Powder pressing
- Substrate steel for surface coating
- Plastic moulds and toolings subjected to abrasive wear conditions
- Knives.

# General

*VANADIS 6* is a chromium-molybdenum-vanadium alloyed PM steel which is characterized by:

- Very high abrasive-adhesive wear resistance
- High compressive strength
- Good toughness
- Very good dimensional stability at heat treatment and in service
- Very good through-hardening properties
- Good resistance to tempering back
- High cleanliness.

Typical analysis %	C 2,1	Si 1,0	Mn 0,4	Cr 6,8	Mo 1,5	V 5,4
Delivery condition	Soft annealed to approx. 255 HB					
Colour code	Green/Dark green					



*Raufoss Teknologi AS, Verktøysfabriken, Norway.*

# Properties

## PHYSICAL DATA

Hardened and tempered to 60 HRC.


Temperature	20°C (68°F)	200°C (390°F)	400°C (750°F)
Density kg/m <sup>3</sup> lbs/in <sup>3</sup>	7 610 0,27	– –	– –
Modulus of elasticity MPa psi	225 000 32,6 x 10 <sup>6</sup>	210 000 30,4 x 10 <sup>6</sup>	190 000 27,5 x 10 <sup>6</sup>
Coefficient of thermal expansion per °C from 20°C °F from 68°F	– –	11,2 x 10 <sup>-6</sup> 6,2 x 10 <sup>-6</sup>	12,0 x 10 <sup>-6</sup> 6,7 x 10 <sup>-6</sup>
Thermal conductivity W/m • °C Btu in/(ft <sup>2</sup> h °F)	– –	22 154	25 175
Specific heat capacity Btu/lb°F J/kg°C	0,110	–	–

## IMPACT STRENGTH


Approximate room temperature impact strength at different tempering temperatures.

Specimen size: 7 x 10 x 55 mm (0,27 x 0,40 x 2,2") unnotched. Hardened at 1050°C (1920°F).

Quenched in air. Tempered 2 x 2h.

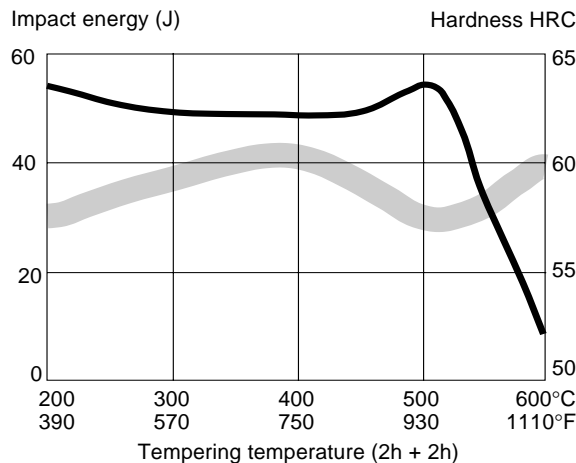

Approximate room temperature impact strength for VANADIS 4, VANADIS 6 and VANADIS 10 at 62 HRC. Transverse direction. High temperature tempered condition

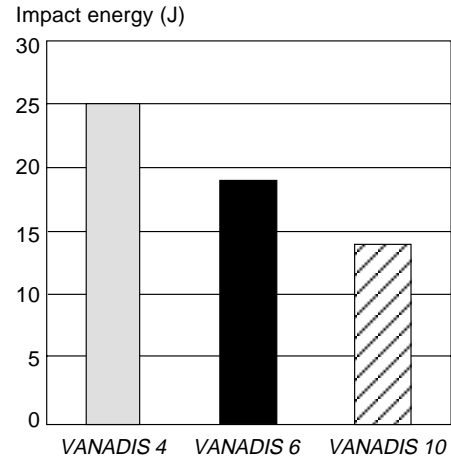


## COMPRESSIVE STRENGTH

Hardness	Compressive strength Rc0,2, MPa
60 HRC	2 290
62 HRC	2 530
64 HRC	2 760

High temperature tempered, 525°C (977°F) 2 + 2h.

## WEAR RESISTANCE

Pin on disc test. Disc material SiO<sub>2</sub>. Hardness is 62 HRC for all steels. High temperature tempered condition. Low value is equivalent to good wear resistance.

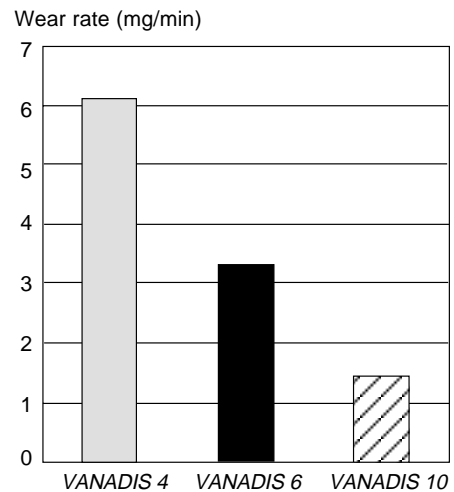

# Heat treatment

## SOFT ANNEALING

Protect the steel and heat through to 900°C (1650°F). Then cool in the furnace at 10°C (20°F) per hour to 750°C (1380°F), then freely in air.

## STRESS RELIEVING

After rough machining the tool should be heated through to 650°C (1200°F), holding time 2 hours. Cool slowly to 500°C (930°F), then freely in air.

## HARDENING

*Pre-heating temperature:* normally in two pre-heat steps; 600–650°C (1110–1200°F) and 900–950°C (1650–1740°F).

*Austenitizing temperature:* 1000–1100°C (1830–2010°F). Normally 1050°C (1920°F).

*Holding time:* 30 min. below 1100°C (2010°F), 15 min. above 1100°C (2010°F).

*Protect the tool against decarburization and oxidation during hardening.*

## QUENCHING MEDIA


- High speed gas/circulating atmosphere
- Vacuum (high speed gas with sufficient positive pressure), preferably at least 4–5 bar
- Martempering bath or fluidized bed at 500–550°C (930–1020°F)
- Martempering bath or fluidized bed at approx. 200–350°C (390–660°F).

*Note 1:* Temper the tool as soon as its temperature reaches 50–70°C (120–160°F).

*Note 2:* In order to obtain the optimum properties for the tool, the cooling rate should be as fast as is concomitant with acceptable distortion.

*Note 3:* Tools with sections >50 mm (2") should be quenched in sufficient gas pressure and speed. Quenching in still air will result in loss of hardness.

*Hardness and retained austenite as functions of austenitizing temperature.*

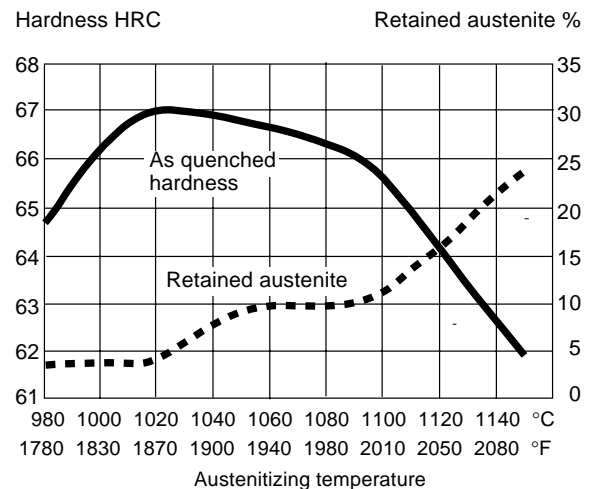


## TEMPERING

The tempering temperature can be selected according to the hardness required by reference to the tempering graph below. Temper minimum twice with intermediate cooling to room temperature.

The lowest tempering temperature which should be used is 180°C (360°F). This temperature should only be used for small and uncomplicated tools.



For medium to large size and more complicated tools a temperature of 250°C (480°F) or higher should be used. When performing a high temperature temper, a temperature to the right of the secondary hardening peak should be chosen.

At a hardening temperature of 1100°C (2010°F) or higher VANADIS 6 must be tempered three times (holding time 1 hour) at minimum 525°C (980°F) in order to reduce the amount of retained austenite. Otherwise the minimum holding time at temperature is 2 hours.



*Electrical components blanked with VANADIS 6 punch.*

Tempering graphs

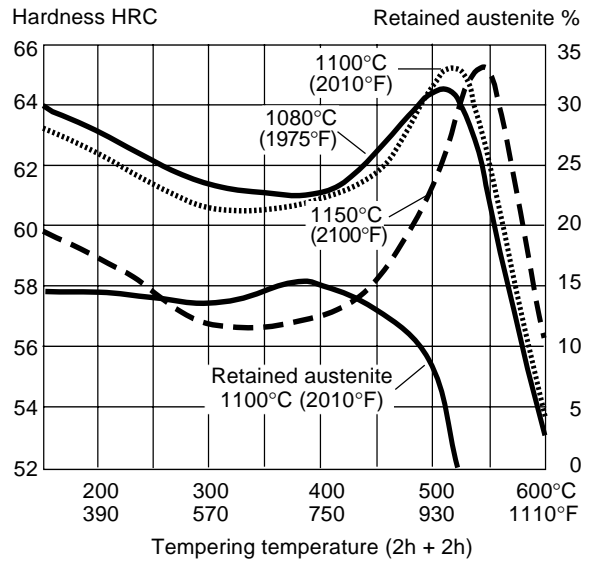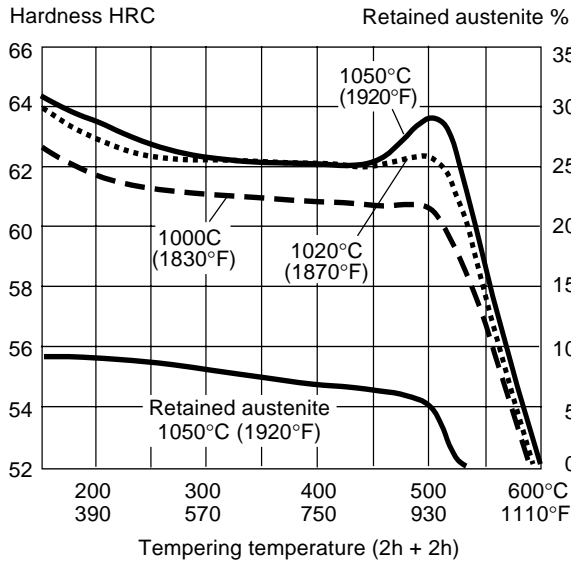

Tempering at high temperature after deep cooling (sub-zero cooling).


The tempering temperature should be lowered 25°C (50°F) in order to get the desired hardness when a high temperature temper is performed.

DIMENSIONAL CHANGES

The dimensional changes have been measured after austenitizing at 1050°C/30 min. (1920°F/30 min.) followed by gas quenching in a cold chamber vacuum furnace. Specimen size: 65 x 65 x 65 mm (2,5" x 2,5" x 2,5")


Austenitizing temperature 1050°C (1920°F)

Dimensional changes %

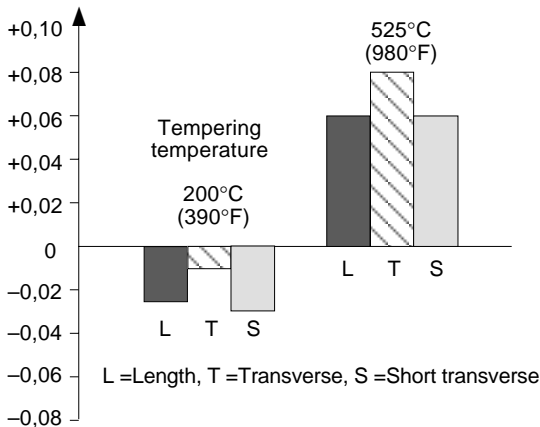

SUB-ZERO TREATMENT


Pieces requiring maximum dimensional stability can be sub-zero treated as follows: Immediately after quenching the piece should be sub-zero treated to between -70 and -80°C (-95 to -110°F), soaking time 1-3 hours, followed by tempering. The tempering temperature should be lowered 25°C (50°F) in order to get the desired hardness when a high temperature temper is performed. Sub-zero treatment will give a hardness increase of ~1 HRC. Avoid intricate shapes as there will be risk of cracking. For the highest demands of dimensional stability sub-zero cooling in liquid nitrogen is recommended after quenching and each tempering.



Parts blanked in a VANADIS 6 tool from Allenvale Tools & Production Ltd., Great Britain.

**TTT-graph**

Austenitizing temperature 1050°C (1920°F). Holding time 30 minutes.

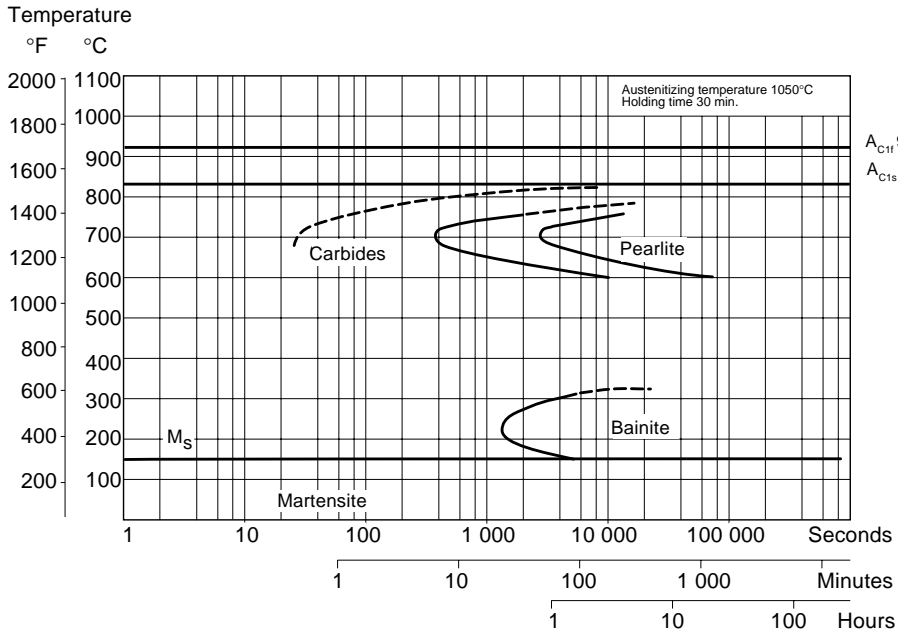


A<sub>C11</sub> 920°C (1690°F)  
A<sub>C1s</sub> 835°C (1535°F)

Temp. °C.	Time hours	Hardness HV10
800	2,25	824
750	4,08	306
700	0,48	394
650	2,17	464
600	16,56	882
450	6,41	882
400	16,35	920
350	16,35	870
300	2,15	857
250	5,42	642
200	2,13	870

**CCT-graph**

Austenitizing temperature 1050°C (1920°F). Holding time 30 minutes.

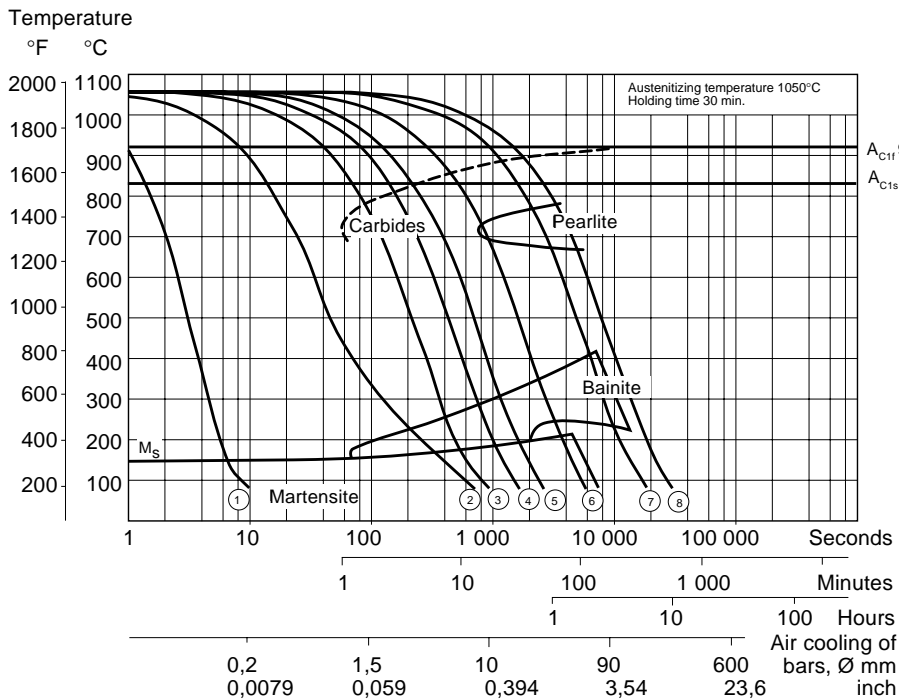

A<sub>C11</sub> 920°C (1690°F)  
A<sub>C1s</sub> 835°C (1535°F)

Cooling curve No.	Hardness HV 10	*T <sub>800-500</sub> (sec)
1	870	2
2	870	31
3	870	140
4	870	280
5	870	450
6	762	1030
7	498	3205
8	351	5215

\*T<sub>800-500</sub> = cooling time between 800-500°C (1472-935°F)

Air cooling of bars, Ø mm  
0,2 0,0079 1,5 0,059 10 0,394 90 3,54 600 23,6 inch

# Surface treatment

Some cold work tool steels are given a surface treatment in order to reduce friction and increase wear resistance. The most commonly used treatments are nitriding and surface coating with wear resistant layers produced via PVD or CVD.

The high hardness and toughness together with a good dimensional stability makes *VANADIS 6* ideal as a substrate steel for various surface coatings.

---

## NITRIDING AND NITROCARBURIZING

---

Nitriding and nitrocarburizing result in a hard surface layer which is very resistant to wear and galling.

The surface hardness after nitriding is approximately 1250 HV<sub>0,2 kg</sub>. The thickness of the layer should be chosen carefully, considering the high alloying elements, to suit the application in question.

---

## PVD

---


Physical vapour deposition, PVD, is a method of applying a wear-resistant coating at temperatures between 200–500°C (390–930°F).

---

## CVD

---

Chemical vapour deposition, CVD, is used for applying wear-resistant surface coatings at a temperature of around 1000°C (1830°F). It is recommended that the tools should be separately hardened and tempered in a vacuum furnace after surface treatment.



*Blanked parts. Punch in VANADIS 6,  
die in VANADIS 10.*

# Machining recommendations

The cutting data below, valid for *VANADIS 6* in soft annealed condition, are to be considered as guiding values which must be adapted to existing local conditions.

## TURNING

Cutting data parameters	Turning with carbide		Turning with HSS Fine turning
	Rough turning	Fine turning	
Cutting speed ( $v_c$ ) m/min. f.p.m.	70–100 230–330	100–120 230–395	8–10 23–33
Feed (f) mm/r i.p.r.	0,3–0,6 0,012–0,023	– 0,3 – 0,012	– 0,3 – 0,012
Depth of cut ( $a_p$ ) mm inch	2–6 0,08–0,23	– 2 – 0,08	– 2 – 0,08
Carbide designation ISO US	K20 C3 Coated carbide	K15 C3 Coated carbide	– –

## DRILLING

### High speed steel twist drill

Drill diameter mm   inch	Cutting speed ( $v_c$ )		Feed (f)	
	m/min	f.p.m.	mm/r	i.p.r.
–5   –3/16	8*	26*	0,05–0,10	0,002–0,004
5–10   3/16–3/8	8*	26*	0,10–0,20	0,004–0,008
10–15   3/8 –5/8	8*	26*	0,20–0,25	0,008–0,010
15–20   5/8 –3/4	8*	26*	0,25–0,30	0,010–0,012

\* For coated HSS drills  $v_c \sim 14$  m/min. (46 f.p.m.).

### Carbide drill

Cutting data parameters	Type of drill		
	Indexable insert	Solid carbide	Brazed carbide <sup>1)</sup>
Cutting speed ( $v_c$ ) m/min. f.p.m.	90–120 300–395	60 200	30 100
Feed (f) mm/r i.p.r.	0,05–0,25 <sup>2)</sup> 0,002–0,01 <sup>2)</sup>	0,10–0,25 <sup>2)</sup> 0,004–0,01 <sup>2)</sup>	0,15–0,25 <sup>2)</sup> 0,006–0,01 <sup>2)</sup>

<sup>1)</sup> Drills with internal cooling channels and a brazed carbide tip.

<sup>2)</sup> Depending on drill diameter.

## MILLING

### Face and square shoulder milling

Cutting data parameters	Milling with carbide		Milling with HSS Fine milling
	Rough milling	Fine milling	
Cutting speed ( $v_c$ ) m/min. f.p.m.	50–70 165–230	70–100 230–330	12 40
Feed ( $f_z$ ) mm/tooth in/tooth	0,2–0,4 0,008–0,016	0,1–0,2 0,004–0,008	0,1 0,004
Depth of cut ( $a_p$ ) mm inch	2–4 0,08–0,2	1– 2 0,04– 0,08	– 2 – 0,08
Carbide designation ISO US	K20 C3 Coated carbide	K15 C3 Coated carbide	– –

### End milling

Cutting data parameters	Type of milling		
	Solid carbide	Carbide indexable insert	High speed steel
Cutting speed ( $v_c$ ) m/min. f.p.m.	40 130	70–90 200–260	7 <sup>1)</sup> 23 <sup>1)</sup>
Feed ( $f_z$ ) mm/tooth in/tooth	0,03–0,2 <sup>2)</sup> 0,001–0,008 <sup>2)</sup>	0,08–0,2 <sup>2)</sup> 0,003–0,008 <sup>2)</sup>	0,05–0,35 <sup>2)</sup> 0,002–0,014 <sup>2)</sup>
Carbide designation ISO US	K10, P40 C3–C5	K15 C3	– –

<sup>1)</sup> For coated HSS end mill  $v_c \approx 23$  m/min. (76 f.p.m.).

<sup>2)</sup> Depending on radial depth of cut and cutter diameter.

## GRINDING

A general grinding wheel recommendation is given below. More information can be found in the Uddeholm publication “Grinding of Tool Steel”.

### Wheel recommendation

Type of grinding	Soft annealed condition	Hardened condition
Face grinding straight wheel	A 46 HV	B151 R50 B3 A 46 GV
Face grinding segments	A 36 GV	A 46 GV
Cylindrical grinding	A 60 KV	B151 R50 B3 A 60 JV
Internal grinding	A 60 JV	B151 R75 B3 A 60 IV
Profile grinding	A 100 IV	B126 R100 B6 A 100 JV

# Electrical-discharge machining—EDM

If EDM is performed in the hardened and tempered condition, finish with “fine-sparking”, i.e. low current, high frequency.

For optimal performance the EDM'd surface should then be ground/polished and the tool retempered at approx. 25° C (50° F) lower than the original tempering temperature.

When EDM'ing larger sizes or complicated shapes *VANADIS 6* should be tempered at high temperatures, above 500° C (930° F).

# Further information

Please, contact your local Uddeholm office for further information on the selection, heat treatment, application and availability of Uddeholm tool steels.

## Relative comparison of Uddeholm cold work tool steel

### MATERIAL PROPERTIES AND RESISTANCE TO FAILURE MECHANISMS

Grade	Hardness/ Resist. to plastic deformation	Machin- ability	Grind- ability	Dimensional stability	Resistance to			Toughness/ gross cracking
					Abrasive wear	Adhesive wear	Ductility/ chipping	
<i>CALMAX</i>	████	████████	████████	██████	████	████	████████	██████
<i>SVERKER 21</i>	████	██████	████	██████	██████	██	██	████
<i>VANADIS 4</i>	██████	██████	████	████████	██████	██████	██████	████
<i>VANADIS 6</i>	██████	████	████	████████	██████	██████	████	████
<i>VANADIS 10</i>	██████	██	██	████████	██████	██████	██	██
<i>VANADIS 23</i>	██████	████	████	██████	██████	██████	████	████
<i>VANADIS 30</i>	██████	████	████	██████	██████	██████	██	██
<i>VANADIS 60</i>	██████	██	██	██████	██████	██████	██	██
<i>AISI M2</i>	██████	████	████	██████	██████	██	██	██